


Instructions for Using LJ-3035 Centaur™

1. Push the Centaur™ over the base of the baluster until it "seats".
2. Use 9/32" twist drill to drill the hole to the desired depth (make certain that the hole is deep enough).
3. Remove the drill bit and Centaur™.

Bottom View

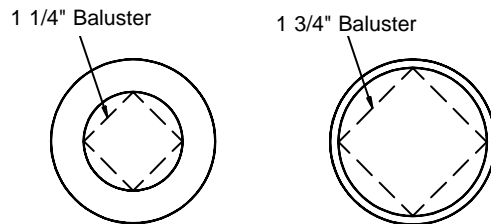

To change Centaur™ from 1 1/4", simply remove the core with a twisting motion. Centaur™ is now ready to use on 1 3/4" balusters.

