



Instructions for Using LJ-3043 Scraper Handle

1. Remove the Scraper Lock Nut and fit the scraper over the Location Pins in the desired position.

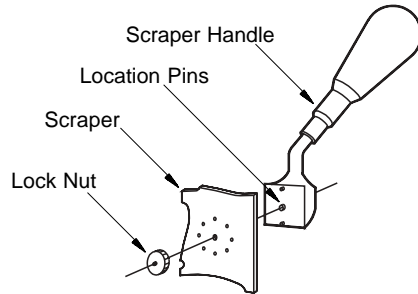

2. Both sides of the rail can be scraped by reversing the scraper, or changing your grip with the handle pointing toward or away from you.

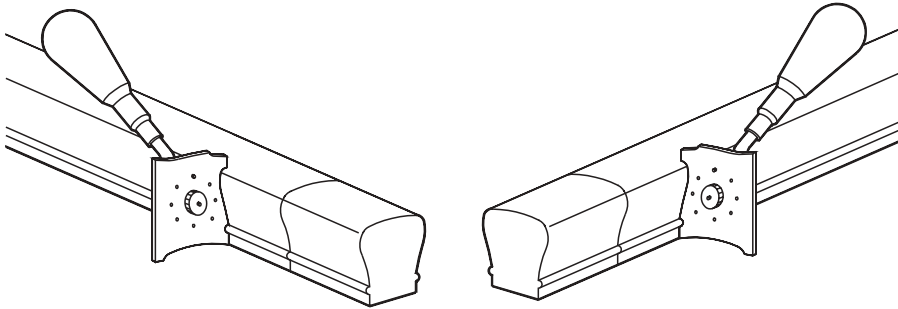

Use the Scraper Sharpener (3041) to keep scrapers performing at their best.