

STANDARD OPEN TREAD STAIR LINEAR METAL PANEL QUOTE AND ORDER TAKEOFF FORM

To order standard panels, the stairway rise and run combination must be 7 1/2" Rise* and 10" Run**. If the stairway does not meet this criteria, use the Custom Open Tread Stair Panel form.

Open Tread Stair

- Balustrade Both Sides
- Balustrade One Side

① 684 Rail (2 5/8" x 1 5/8")

- Specie _____
- Use 684 Rail as the Starting Newel

② Newels (if desired)

Choose Style:

- LJ-4110 (3")
- LJ-4000 (3 1/2")
- LJ-4101 (3", 3 1/4", 3 1/2", 4")
- LJ-4101G (3 1/2")
- AS300MD (3")
- AS350MD (3 1/2")

Specie _____

③ Treads (if desired)

Choose Style:

- Bullnose
- Square nose
- Box Treads

Tread Width _____

Specie _____

④ Balcony Panels

Choose Rail Height/Style:

- 36" Flush Mounted
- 39" Flush Mounted
- 39" Elevated
- 43" Elevated

⑤ Stair Flights (additional flights)

Flight 2:

Plan View Dimension _____

Rise _____ Run _____

Balustrade:

- Both Sides
- One Side

Flight 3:

Plan View Dimension _____

Rise _____ Run _____

Balustrade:

- Both Sides
- One Side

⑥ Balcony (additional sections)


Section 2:

Plan View Dimension _____

Section 3:

Plan View Dimension _____

Fill in measurements below and Steps 1-6

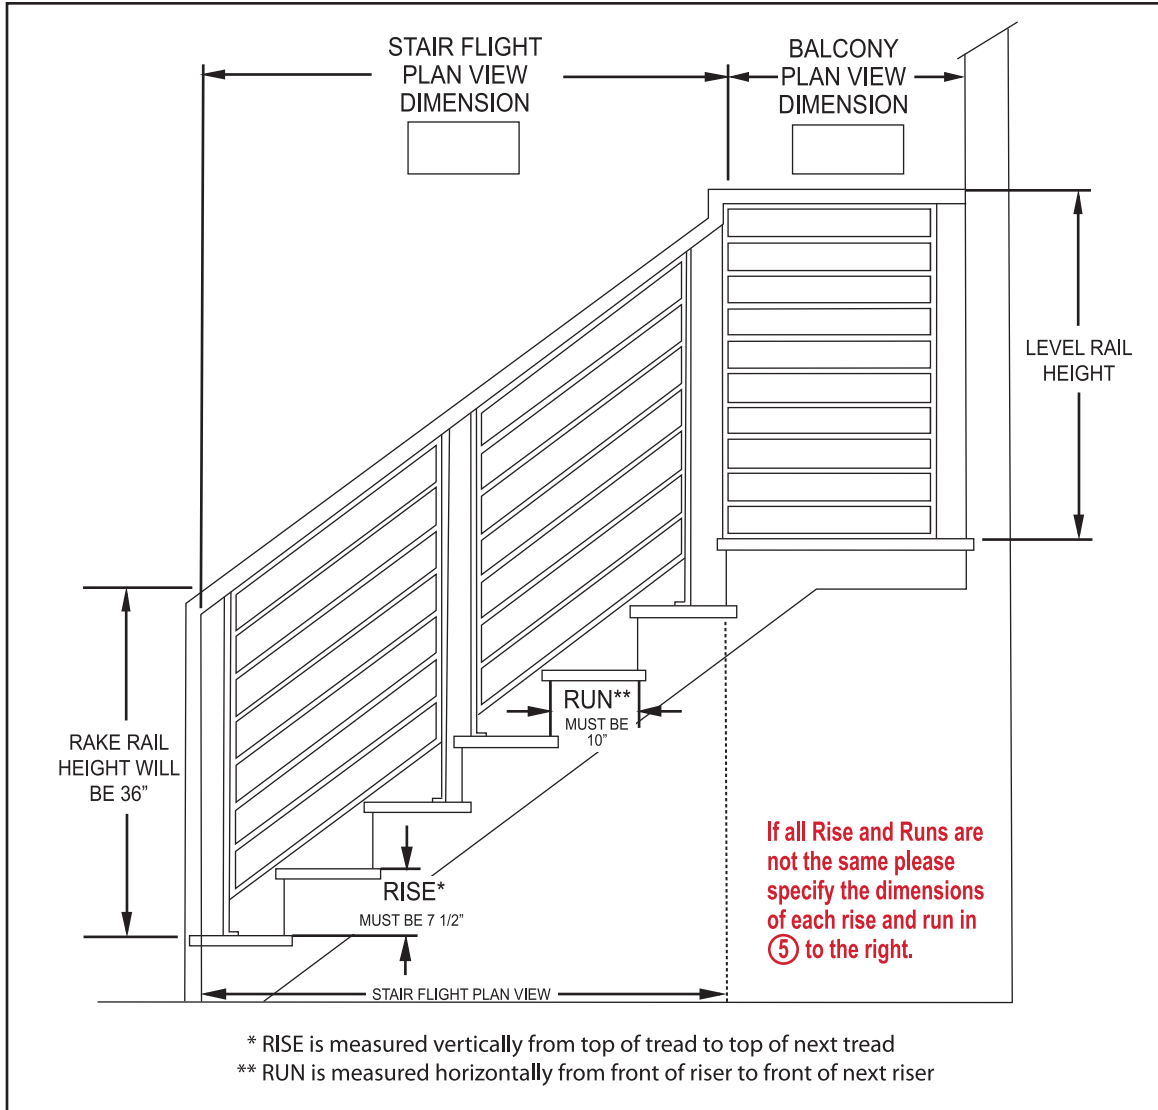

Please supply drawings and pictures

Customer Name: _____
 Address: _____
 City: _____ State: _____ Zip: _____
 Contact Same as above
 Name: _____
 Phone: _____
 Email: _____
 Today's Date (mm/dd/yyyy): _____

Additional Notes if needed:

⑥ Balcony (additional sections)

Section 2:

Plan View Dimension _____

Section 3:

Plan View Dimension _____